

**NOTE: AIR TOOL OIL AVAILABLE IN ONE LITRE BOTTLES**

## T5109 - 4" High Speed Grinder

- Light sanding feather edging
- Rust removal
- 18,000 rpm free speed for fast action
- Complete with safety guard and disc
- Average air consumption 3 cfm
- Display packed




## T491L - 4" Angle Grinder

- Heavy duty tool for cutting and grinding
- Built in governor
- Movable guard and side handles for left or right hand use
- Safety start lever
- Compact 9 1/2" length
- Free speed 10,000 rpm
- Weight 1.9kg
- Air consumption 8 cfm at 90 psi
- Display packed



## T5207 - Extended Die Grinder

- Use to clean up castings and polishing valve ports
- The rear exhaust directs air away from the workplace
- An extended spindle provides easy access to awkward places
- Three-piece designed collet ensures maximum holding power

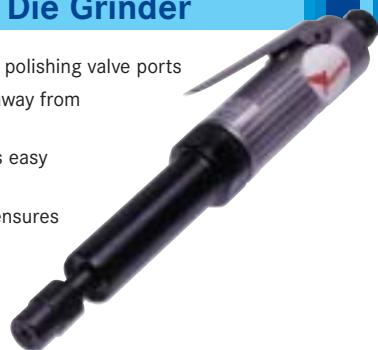

## T5200 - 1/4" Die Grinder

- Use to clean up castings, smoothing out cylinder heads and more besides
- Built in regulator matches speed to requirements
- Ball bearing construction to extend life
- Maximum speed 22,000 rpm
- Average air consumption 3 cfm
- Display packed



## T5200K - 1/4" Die Grinder Kit

- Complete with 10 mounted stones
- Built in regulator matches speed to requirements
- Rear exhaust directs air away from work
- Speed 22,000 rpm for fast, vibration free performance
- Ball bearing construction
- 1/8" chuck and connector
- Average air consumption 3 cfm
- Display packed



## T5655 - Pistol Grip 1/4" Screwdriver

- Ideal for assembly line work and maintenance workshops
- Light and powerful
- Silenced handle directs air away from user
- Special spindle mounting prevents wobble
- Features standard quick change clutch that does not require dismantling to adjust



## T5653 - Straight Grip 1/4" Screwdriver

- Ideal for assembly line work and maintenance workshops
- Silenced handle directs air away from user
- Special spindle mounting prevents wobble
- Features standard quick change clutch that does not require dismantling to adjust
- Includes suspension hanger
- Single handed reverse button
- Light and powerful



Technical specifications	
Speed (unloaded)	1,800 rpm
Torque range	45 - 115lbs/in (39 - 100kgs/cm)
Average air consumption	6.5 cfm (184ltr/min)
Weight	1.1 kgs
Length	205mm
Clutch type	Cushion clutch

Technical specifications	
Speed (unloaded)	1,800 rpm
Torque range	45 - 115lbs/in (39 - 100kgs/cm)
Average air consumption	6.5 cfm (184ltr/min)
Weight	1.16 kgs
Length	265mm
Clutch type	Cushion clutch