

Nippon Pneumatic Manufacturing Co. Ltd., from Japan, have been a feature of Algin Air / Kestrel Equipments' product range for over 30 years. Shown below are a selection from the vast range available.


The NPK catalogue is available upon request.

## Wrenches



**NWH-320A**

3 Steps of power control

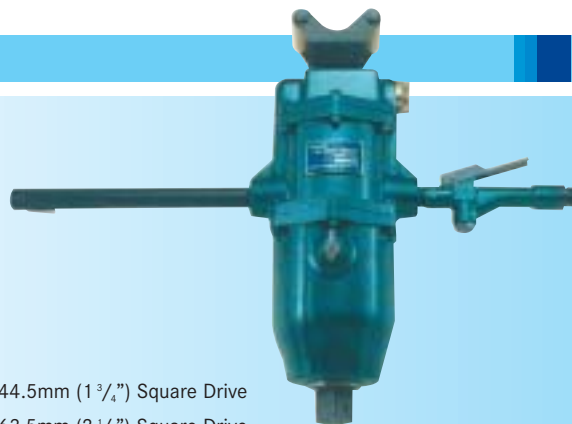

**NWH-750**

44.5mm (1 3/4") Square Drive

**NWH-750-24**


63.5mm (2 1/2") Square Drive

Model No.	Capacity (Bolt Size)		Free Speed rpm	Overall Length Approx.		Nett Weight Approx.		Spindle Offset Approx.		Square Shank Size		Air Inlet Thread Rc or NPT	Hose Size		Average Air Consumption	
	mm	in		mm	in	kg	lb	mm	in	mm	in		mm	in	m <sup>3</sup> /min	ft <sup>3</sup> /min
NWH-320A	39	1 1/2	4,000	368	14 1/2	9.1	20	55	2 5/32	25.4	1	3/8	12.7	1/2	0.5	17.7
NWH-750	75	3	2,200	634	24 31/32	52.5	115.5	95	3 3/4	44.5	1 3/4	G1	19.0	3/4	1.5	53
NWH-750-24	75	3	2,200	634	25 7/16	52.6	115.7	95	3 3/4	63.5	2 1/2	G1	19.0	3/4	1.5	53

## Drills - Reversible type

**NRD-14LW, NRD-16RLW, NRD-19RLW, NRD-22RLW**

Safety lever type

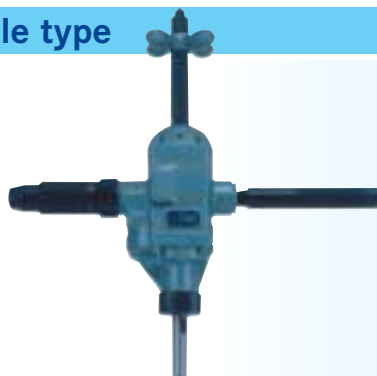

**NRD-23RLW, NRD-25RLW, NRD-28RLW, NRD-32LRLW**

Safety lever type



Model No.	Drilling Capacity		Spindle Morse Taper No.	Free Speed rpm	Net Weight Approx.		Overall Height Approx.		From Centre to Outside Approx.		Feed Length Approx.		Air Inlet Thread RC or NPT	Hose Size		Maximum Output		Average Air Consumption Approx.	
	mm	in			kg	lb	mm	in	mm	in	mm	in		mm	in	kw	ps	m <sup>3</sup> /min	ft <sup>3</sup> /min
NRD-14RLW	14	5/16	1	1,100	5.3	11.7	436	17 5/32	39	1 17/32	60	2 3/8	3/8	12.7	1/2	0.96	1.3	1.1	38.8
NRD-16RLW	16	5/8	2	900	5.5	12.1	451	17 3/4	39	1 17/32	60	2 3/8	3/8	12.7	1/2	0.96	1.3	1.1	38.8
NRD-19RLW	19	3/4	2	750	5.5	12.1	451	17 3/4	39	1 17/32	60	2 3/8	3/8	12.7	1/2	0.96	1.3	1.1	38.8
NRD-22RLW	22	7/8	2	600	5.5	12.1	451	17 3/4	39	1 17/32	60	2 3/8	3/8	12.7	1/2	0.96	1.3	1.1	38.8
NRD-23RLW	23	29/32	2	700	10.2	22.4	355	14	41	1 5/8	100	4	3/8	12.7	1/2	1.47	2.0	1.4	49.4
NRD-25RLW	25	1	3	570	10	22	355	14	41	1 5/8	100	4	3/8	12.7	1/2	1.47	2.0	1.4	49.4
NRD-28RLW	28	1 1/8	3	450	10	22	355	14	41	1 5/8	100	4	3/8	12.7	1/2	1.47	2.0	1.4	49.4
NRD-32LRLW	32	1 1/4	3	380	10	22	355	14	41	1 5/8	100	4	3/8	12.7	1/2	1.47	2.0	1.4	49.4

Drills only available with safety lever

## Grinders

**NAG-1BLW**

Non-governor safety lever type



**NAG-11A-04**

Rear exhaust, spindle lock system, safety lever type right/Left replaceable handle

**NAG-11A-05**

Rear exhaust, spindle lock system, safety lever type spindle thread: M14 x 2.0, Right/Left replaceable handle

**NAG-11A-U5**

Rear exhaust, spindle lock system, safety lever type spindle thread: 5/8"-11 UNC, Right/Left replaceable handle



Model No.	Capacity (Wheel size)		Max. Free Speed rpm	Overall Length		Height Approx.		Net Weight Approx.		Air Inlet Thread RC or NPT	Hose Size		Maximum Ouput Approx.		Average Air Consumption	
	mm	in		mm	in	mm	in	kg	lb		mm	in	kw	ps	m <sup>3</sup> /min	ft <sup>3</sup> /min
NAG-1BLW	100 x 6 x 15.9	4 x 1/4 x 3/8	12,700	232	9 1/8	77	3 1/32	1.5	3.3	1/4	9.5	3/8	0.63	0.85	0.68	24
NAG-11A-04	100 x 6 x 15.9	4 x 1/4 x 3/8	12,000	124	4 7/8	94	3 11/16	2.2	4.9	3/8	9.5	3/8	0.65	0.88	0.8	28
NAG-11A-05	125 x 6 x 22	5 x 1/4 x 7/8	12,000	124	4 7/8	98	3 7/8	2.3	5.1	3/4	9.5	3/8	0.65	0.88	0.8	28
NAG-11A-U5	125 x 6 x 22	5 x 1/4 x 7/8	12,000	124	4 7/8	111	4 3/8	2.2	4.9	3/8	9.5	3/8	0.65	0.88	0.8	28