


Tyre Valve Connectors



- **C01A03** Twin hold-on (open end)
- **C01B03** Twin hold-on (closed end)
- **C05A03** Twin hold-on (open end) Short Stem
- **C03A03** Twin clip-on (open end)
- **C03B03** Twin clip-on (closed end)
- **C02H03** Single clip-on (open end) tailpiece for 6.35mm (1/4") bore hose
- **C02J03** Single clip-on (closed end) tailpiece for 6.35mm (1/4") bore hose
- **C02E03** Single clip-on (open end) tailpiece for 4.75mm (3/16") bore hose
- **C02F03** Single clip-on (closed end) tailpiece for 4.75mm (3/16") bore hose
- **C08E72** Euro style single clip-on (open end) for 4.75mm (3/16") bore hose
- **C0671** Ball Foot Chuck (closed end) with integral tailpiece for 4.75mm (3/16") bore hose
- **C09H03** 8V1 Screw-on for 6.35mm bore hose (open end)
- **C09P03** 8V1 Screw-on Rp 1/4" (open end)
- **C010H03** 12V1 Screw-on for 6.35mm bore hose (open end)
- **C010P03** 12V1 Screw-on Rp 1/4" (open end)

Tyre Pressure Gauges

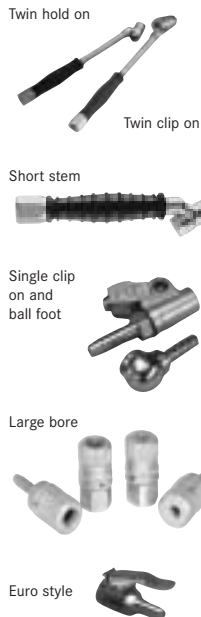

- **DPG1H03** 63mm Tyrecheck c/w twin hold-on connector
- **DPG1H08** 63mm Tyrecheck c/w single clip-on connector
- **DPG3H03** 80mm Tyrecheck c/w twin hold-on connector
- **DPG3H08** 80mm Tyrecheck c/w single clip-on connector
- **TPG1H01** Pocket type angled head dual calibrated 6 to 50 lbf/in² in 1lb units and 0.5 to 3.4 bar in 0.1 bar units. Bulk packed
- **TPG20H01** Pocket type in-line head dual calibrated 6 to 50 lbf/in² in 1lb units and 0.5 to 3.4 bar in 0.1 bar units. Bulk packed
- **TPG3H01** Pocket type angled head dual calibrated 10 to 120 lbf/in² in 2 lb units and 0.8 to 8.2 bar units. Bulk packed
- **TPG6A01** Pocket type angled head calibrated 2 to 20 lbf/in² in 1 lb units. Bulk packed.
- **TPG4H01** Pocket service type dual calibrated 10 to 120 lbf/in² in 2lb units and 0.8 to 8.2 bar in 0.2 bar units. Bulk packed
- **TPG57H03** Universal service gauge dual calibrated 10 to 160 lbf/in² in 2lb units and 0.8 to 11 bar in 0.2 units. Packed in individual cardboard carton
- **TPG60H03** Universal service gauge dual calibrated 10 to 160 lbf/in² in 2lb units and 0.8 to 11 bar in 0.2 bar units. Packed in individual cardboard carton
- **TPG15H03** Tractor gauge air and water type, dual calibrated 6 to 50 lbf/in² in 2lb units and 0.5 to 3.4 bar in 0.2 bar units. Packed in individual cardboard carton
- **TPG54H03** Twin head tyre gauge dual calibrated 50 to 300 lbf/in² in 5lb units and 4 to 20 bar in 0.2 bar units. Individually packed in a transparent plastic wallet. Suitable for use with 0.302 (8V1) and 0.482 (12V1) tyre valves

Dial Type Airline Gauges




- **ALG7H03** Dial Type Airline Gauge with 0.53m (21") hose and twin hold-on connector (open end)
- **ALG7H04** Dial Type Airline Gauge with 1.8m (6ft) hose and single clip-on connector (open end)
- **ALG7H041** Dial Type Airline Gauge with 2.7m (9ft) hose and single clip-on connector (open end)
- **ALG7H05** Dial Type Airline Gauge with 1.8m (6ft) hose and twin clip-on connector (open end)
- **ALG7H06** Dial Type Airline Gauge with 2.7m (9ft) hose and twin clip-on connector (open end)
- **ALG7H08** Dial Type Airline Gauge with 0.53m (21") hose and Euro style single clip-on connector (open end)
- **ALG7H081** Dial Type Airline Gauge with 1.2m (4ft) hose and Euro style single clip-on connector (open end)

MK3 Airline Gauges



- **ALG3H04** Airline Gauge MK3 with single clip-on connector (open end)
- **ALG3H03** Airline Gauge MK3, with twin hold-on connector (open end)
- **ALG3H031** Forecourt model, wire braided 0.36m hose with short stem twin hold on connector
- **ALG3H05** "Tyre Shop" Airline Gauge, with 1.8m (6ft) hose and twin clip-on connector (open end)
- **ALG3H06** "Tyre Shop" Airline Gauge with 2.7m (9ft) hose and twin clip-on connector (open end)
- **ALG3H061** "Tyre Shop" Airline Gauge, with 2.7m (9ft) hose and single clip-on connector (open end)
- **ALG5H04** High pressure model with 1.8m (6ft) hose and single clip-on connector (open end), calibrated 45 to 300 lbf/in² and 3 to 21 bar
- **ALG5A02** High pressure model with 2m reinforced hose and single 8V1 screw-on connector (open end), calibrated 45 to 300 psi
- **ALG5A03** High pressure model with 2m reinforced hose and single 12V1 screw-on connector (open end), calibrated 45 to 300 psi

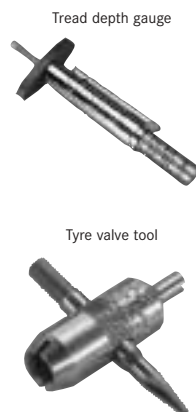

- Packaging available:**
 1-Bulk Packed, 2-Wallet, 3-Carton, 4-Individual skin pack c/w wallet, 5-Individual skin pack, 6-Skin packed tear-off strip of 10
- **TDG16C05** Tread depth gauge complies with EC directive 89/459/EEC. 1.6mm marking. Skin packed
 - **TPDG1S03** Combined digital tyre pressure and tread depth gauge. Pressure ranges selectable 0 to 140 psi and 0 to 10 bar. Tread depth gauge 0 to 16mm
 - **TSP1T05** Tyre safety pack. Skin packed. Comprising tyre pressure gauge, tyre tread depth gauge and wallet
 - **TVT05** 4 in 1 Tyre valve tool, Skin packed