

CNS GRINDERS

The CNS Grinder is most suitable for removing block skin scale, oxide layer, or paint and provides uniform and beautiful facing.




NHG-65G
Built-in Governor



NHG-75G
Built-in Governor



NAG-40G
Built-in Governor
Low Sound Level

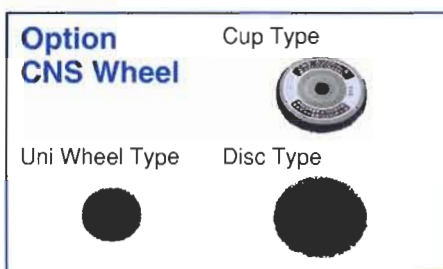

CNS Wheel	Code No.	Model No.
Cup Type	24906001	NAG-40G
Uni Wheel Type	24906005	NHG-65G
Disc Type	24906003	NHG-75G

SPECIFICATIONS

Recommended Air Pressure 0.6MPa (6kgf/cm²,85psi)

Type	Model No.	Capacity (Wheel Size)		Max. Free Speed rpm	Overall Length Approx.		Height Approx.		Net Weight Approx.		Max. Output Approx.		Air Inlet Thread Rc or NPT	Hose Size		Average Air Consumption	
		mm	in		mm	in	mm	in	kg	lb	kw	ps		mm	in	m ³ /min	ft ³ /min
Safety Grip	NHG-65G	65×26×9.5	2½×1×¾	14,000	309	12 1/8	—	—	1.3	2.9	0.44	0.6	¼	9.5	¾	0.55	19.4
	NHG-75G	100×26×9.5	4×1×¾	6,000	327	12 7/8	—	—	1.7	3.7	0.48	0.65	¼	9.5	¾	0.45	15.9
	NAG-40G	100×13×16	4×½×⅝	9,500	218	8 13/32	87	3 7/16	1.5	3.3	0.58	0.79	¼	9.5	¾	0.55	19.4

Specifications are subject to change without notice.

CLEANER

JAC-2 can suck up any dust instead of blowing off by airduster. The cleaner is quite effective and useful in foundry, machining factory and automotive repair shop.



JAC-2

SPECIFICATIONS

Recommended Air Pressure 0.6MPa (6kgf/cm²,85psi)

Model No.	Sucking	Overall Length Approx.		Net Weight Approx.		Suction Hose Diameter		Air Inlet Thread Rc or NPT	Hose Size		Average Air Consumption	
	mmAq	mm	in	kg	lb	mm	in		mm	in	m ³ /min	ft ³ /min
JAC-2	1,800	200	7 7/8	0.77	1.7	32	1 1/4	¼	9.5	¾	0.6	21.2

Specifications are subject to change without notice.