

(PULSUS)

OIL PULSE DRIVERS

6.35mm(1/4") Hex. Shank

Quick Change Chuck Type




NPW-450A-DX0
NPW-450A-DY0




NPW-550A-DX0
NPW-550A-DY0

X Type

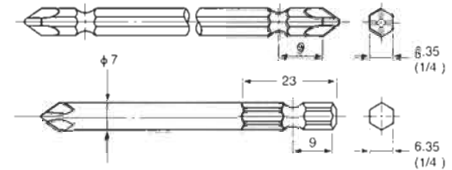

Y Type

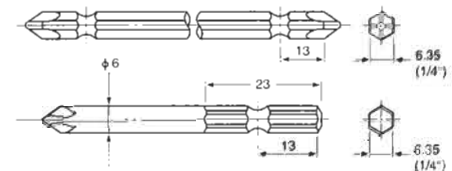

X Type		Y Type	
1	NPW-450A-DX0	1	NPW-450A-DY0
2	NPW-550A-DX0	2	NPW-550A-DY0
3	NPW-450EA-DX0	3	NPW-450EA-DY0
4	NPW-450A-TDX	4	NPW-450A-TDY
5	NPW-550A-TDX	5	NPW-550A-TDY

STRAIGHT TYPE



NPW-450EA-DX0
NPW-450EA(S)-DY0



SPECIFICATIONS

Figures of torque adjustment range are measured by NPK torque meters.
Recommended Air Pressure 0.6MPa (6kgf/cm², 85psi)

Model No.	Capacity (Bolt Size)		Torque Adjustment Range (Reference)			Free Speed Approx.	Overall Length Approx.		Net Weight Approx.		Spindle Offset Approx.		Hex. Shank Size		Air Inlet Thread		Hose Size		Average Air Consumption	
	mm	in	N · m	kgf · cm	ft · lb	rpm	mm	in	kg	lb	mm	in	mm	in	Rc or NPT	mm	in	m ³ /min	ft ³ /min	
NPW-450A-DX0,DY0	6	1/4	24.5-31.4	250-320	18-23	6,500	157	6 3/16	0.93	2.05	23	7/8	6.35	1/4	1/4	6.3	1/4	0.3	10.6	
NPW-550A-DX0,DY0	8	5/16	26.5-39.2	270-400	20-29	6,500	160	6 5/16	1.0	2.20	23	7/8	6.35	1/4	1/4	9.5	3/8	0.35	12.4	
NPW-450EA-DX0,DY0	6	1/4	20.6-29.4	210-300	15-22	6,000	244	9 10/16	0.88	1.94	23	7/8	6.35	1/4	1/4	6.3	1/4	0.23	8.1	

Specifications are subject to change without notice.